

Plug-In Pedestal Alarm System

**Observer
100**

BENEFITS & FEATURES


- Rugged Nema 3R water tight enclosure rated for outdoor use
- 120 / 240 VAC receptacles for plugging in the pump and switch
- Built-in high water alarm with horn and light (test feature included)
- 120 VAC with 9 VAC battery back-up alarm, complete with automatic reset
- Spacious panel designed with 120 VAC or 240 VAC pump power supply and 120 VAC alarm power
- Mechanical alarm float switch with 20' cord
- Large access port with gas/liquid tight seal for cord connections
- Positive snap cover for quick and convenient installation
- Auxiliary contacts standard
- Pending UL on complete pedestal assembly
- 2 year limited warranty

SPECIFICATIONS

Enclosure Dimensions	7.5 X 7.5 X 11
Overall Dimensions	7.5 X 7.5 X 46.5
Enclosure	Nema 3R, UV protected PVC rated for outdoor use
Alarm Horn	85 db at 10'
Battery Back-Up	9 VDC for alarm horn
Light	10 watts 120 VAC
Receptacle	120 VAC or 240 VAC
Full Load Amps	12
Weight	14 lbs.
Alarm Float	20' mechanical float with tie strap (normally open)
Pump Voltage	120 / 240 VAC, 60 Hz single phase
Alarm Voltage	120 VAC, 60 Hz single phase
Standard Auxiliary Contacts	240 VAC, 5 amps max resistive / 60 Hz



120 V

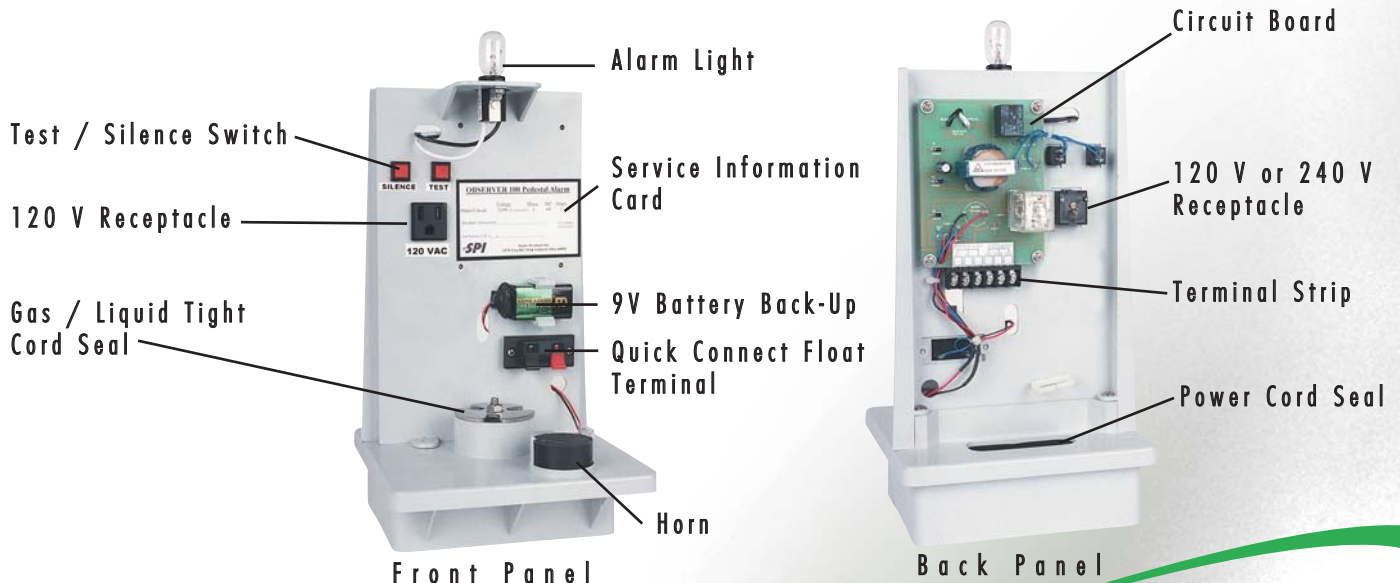

Indoor High Water Alarm with Battery Back-Up

**Observer
200**



Septic
Products Inc.

BENEFITS & FEATURES

- Durable Nema 1 thermoplastic enclosure rated for indoor use
- Red "alarm" light, green "on" light and 85 decibel horn at 10 feet
- Mechanical alarm float switch included (15' cord)
- Alarm test and horn silence button with auto reset – 120 VAC
- The alarm will continue to work even when the primary power fails due to our battery back-up feature
- Auxiliary dry contacts are standard
- External quick connect terminal block for easy float installation
- Pending UL
- Two-year limited warranty

SPECIFICATIONS

Dimensions	6" X 3-3/4" X 2-1/2"
Enclosure	Nema 1 thermoplastic (external mounting feet)
Horn	85 db at 10'
Weight	2.5 lbs with float
Voltage	Primary: 120 VAC, 9 VAC secondary, 60 Hz (alarm condition 2.5 watts max)
Power Cord	6 feet, 120 VAC
Float Switch	15' mechanical float with tie strap (normally open)
Float Switch Connection	Quick connect float connection. Do not apply power. Class two output, 12 VAC
Standard Auxiliary Contacts	240 VAC, 5 amp max resistive / 60 Hz

Indoor High Water Alarm

**Observer
300**



BENEFITS & FEATURES

- Nema 1 steel enclosure rated for indoor use
- Red "alarm" light, green "on" light and 85 decibel horn at 10 feet
- Mechanical alarm float switch included (15' cord)
- Alarm test and horn silence switch – 115 / 240 VAC
- External quick connect terminal block for easy float installation.
- UL listed alarm system 115 VAC only
- Two-year limited warranty



SPECIFICATIONS

Dimensions	6" X 4" X 2-1/2"
Enclosure	Nema 1 metal (external mounting feet)
Horn	85 db at 10'
Weight	2.5 lbs. with float
Voltage	Primary: 120 VAC, 12 VAC secondary, 60 Hz (alarm condition 2.5 watts max)
Power Cord	6 feet, 120 VAC
Float Switch	15' mechanical float with tie strap (normally open)
Float Switch Connection	Quick connect float connection. Do not apply power. Class two output, 12 VAC

Indoor/Outdoor High Water Alarm

BENEFITS & FEATURES

- Nema 3R water-tight enclosure rated for indoor and outdoor use
- Automatic alarm re-set, horn silence button, and alarm test button
- 360 degree visible alarm light
- Alarm horn sounds to 85 decibels at 10'
- Mechanical alarm float switch included (15' cord)
- Auxiliary dry contacts are standard
- SST mounting screws included
- UL listed alarm system
- Two-year limited warranty



Observer
400



SPECIFICATIONS

Dimensions	6.5" X 4.5" X 3" (external mounting feet)
Enclosure	Nema 3R weatherproof thermoplastic (water-tight)
Horn	85 db at 10'
Weight	3.5 lbs. with float
Alarm Voltage	Primary: 120 VAC, 12 VAC secondary, 60 Hz (alarm condition 15 watts max)
Float Switch	15' mechanical float with tie strap (normally open)
Float Switch Connection	Internal terminal strip
Power Cord	6 feet power cord (optional)
Alarm Light	360 degree visible
Auxiliary Contacts	240 VAC, 5 amp max resistive / 60 Hz

Septic
Products Inc.

Indoor / Outdoor High Water Alarm

BENEFITS & FEATURES

- Nema 4X type thermoplastic enclosure designed for indoor / outdoor use
- 360 degree red "alarm" light, and alarm horn
- Alarm test button and horn silence button, with auto reset
- Mechanical float switch included (15' cord)
- 6' 120 VAC power cord
- External cord grips for easy installation
- Two-year limited warranty

SPECIFICATIONS

Dimensions	5.5" x 3.75" x 3.75" (external mounting feet)
Enclosure	Nema 4X type thermoplastic
Horn	85 db at 10' solid tone alert
Weight	3.8 lbs. with float
Alarm Voltage	Primary: 120 VAC, 12 VAC secondary, 60 Hz (alarm condition 6.5 watts max)
Power Cord	120 VAC, 6 feet
Alarm Light	360 degree visible - 2" tall
Float Switch	15' mechanical float with tie strap. (normally open)
Float Switch Connection	Internal terminal strip

Observer
500

