

## Standard Duty Mechanical Float Switch (1/2 Hp 120 v / 1 Hp 240 v)



### BENEFITS & FEATURES

- Mechanically activated wide angle float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Controls pumps up to 1/2 HP at 120 VAC, and 1 HP at 240 VAC
- Available for pump up and pump down applications
- Adjustable pumping range of 6 to 36 inches
- 16 gauge, 2 conductor, SJOW water resistant (CPE) material
- Max pump running current, 13 amps
- Max pump starting current, 59 amps
- 10', 15', 20', 30', 50' cord with or without piggyback plug
- Individually boxed and includes SST pipe mount assembly
- UL / CSA recognized
- 3 year limited warranty


## Heavy Duty Mechanical Float Switch (1 Hp 120 v / 2 Hp 240 v)



### BENEFITS & FEATURES

- Mechanically activated wide angle float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Controls pumps up to 1 HP at 120 VAC, and 2 HP at 240 VAC
- Available for pump up and pump down applications
- Adjustable pumping range of 6 to 36 inches
- 14 gauge, 2 conductor, SJOW water resistant (CPE) material
- Max pump running current, 15 amps
- Max pump starting current, 96 amps
- 10', 15', 20', 30', 50' cord with or without piggyback plug
- Individually boxed and includes SST pipe mount assembly
- UL / CSA recognized
- 3 year limited warranty

## Vertical Mechanical Float Switch (1/2 Hp 120 v / 1 Hp 240 v)

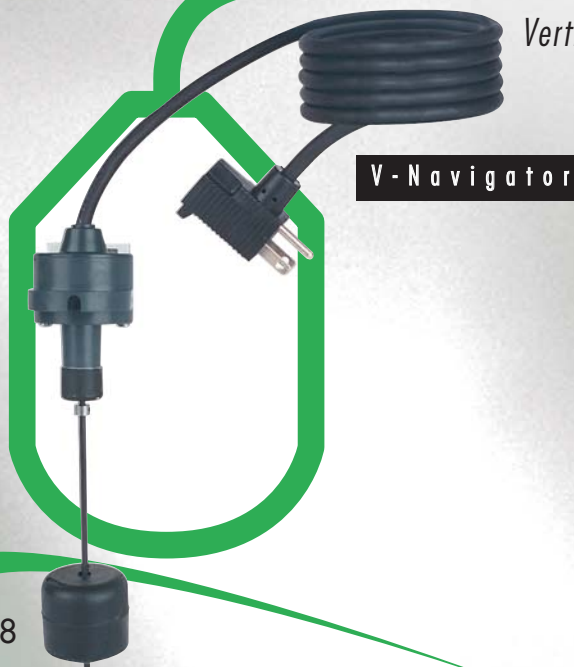

### BENEFITS & FEATURES

- Mechanically activated vertical float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Designed to operate in confined areas
- Controls pumps up to 1/2 HP at 120 VAC, and 1 HP at 240 VAC
- Available for pump down applications
- Adjustable pumping range of 1 to 6 inches
- 16 gauge, 2 conductor, SJOW water resistant (CPE) material
- Max pump running current, 10 amps
- Max pump starting current, 59 amps
- 10', 15', 20', 30' cord with piggyback plug
- Individually boxed and includes SST pipe mount assembly
- UL / CSA recognized
- 3 year limited warranty

*High AMP Mechanical Float Switch (1-1/2 Hp 120 v / 3 Hp 240 v)*

**BENEFITS & FEATURES**

- Mechanically activated wide angle float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Controls pumps up to 1-1/2 HP at 120 VAC, and 3 HP at 240 VAC
- Available for pump down applications
- Adjustable pumping range of 8 to 28 inches
- 12 gauge, 2 conductor, SJOW water resistant (CPE) material
- Max pump running current, 25 amps
- Max pump starting current, 96 amps
- 10', 15', 20', 30', 50' cord lengths for direct wiring only
- Individually boxed and includes SST pipe mount assembly
- UL / CSA recognized
- 3 year limited warranty

**A- Navigator**



*Standard Duty Mercury Float Switch (1/2 Hp 120v / 1 Hp 240 v)*

**BENEFITS & FEATURES**

- Mercury activated wide angle float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Controls pumps up to 1/2 HP at 120 VAC, and 1 HP at 240 VAC
- Available for pump up and pump down applications
- Adjustable pumping range of 6 to 36 inches
- 16 gauge, 2 conductor, SJOW water resistant (CPE) material
- Max pump running current, 13 amps
- Max pump starting current, 43 amps
- 10', 15', 20', 30', 50' cord with piggyback plug
- Individually boxed and includes SST pipe mount assembly
- UL / CUL recognized
- 3 year limited warranty

\* Not recommended for use in drinking water applications.

**Junior M- Navigator**




*Double Heavy Duty Mercury Float Switch (1 Hp 120 v / 2 Hp 240 v)*

**BENEFITS & FEATURES**

- Mercury activated wide angle float to directly control a pump
- Not sensitive to rotation or turbulence
- For use in water and sewage applications
- Controls pumps up to 1 HP at 120 VAC, and 2 HP at 240 VAC
- Available for pump up and pump down applications
- Adjustable pumping range of 2 to 54 inches
- 14 gauge, 3 conductor, SJOW water resistant (CPE) material
- Max pump running current, 15 amps
- Max pump starting current, 96 amps
- 10', 20', 30', cord with piggyback plug
- Individually boxed and includes SST pipe mount assembly
- UL / CSA recognized
- 3 year limited warranty

**Double M- Navigator**

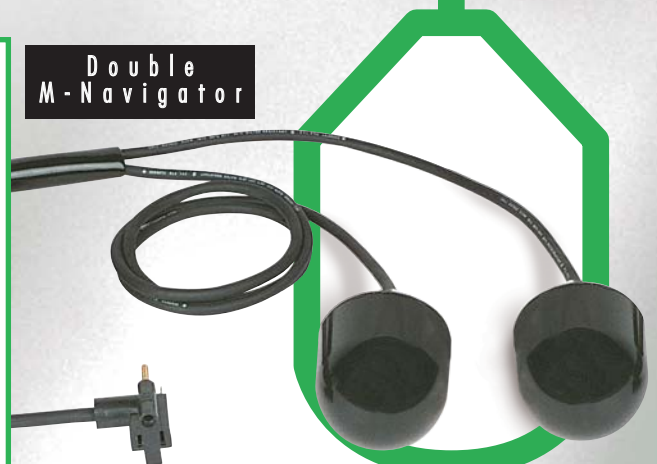

\* Not recommended for use in drinking water applications.